



01 EU PLUG TYPE

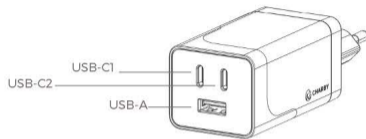

02 US PLUG TYPE



CHARBY PICO is a 65W pocket-sized charger powered by the latest semiconducting material - Gallium Nitride (GaN). It comes with 2 USB-C and 1 USB-A output. It enables PD charging via the 2 USB-C ports to charge high power devices such as laptops and Macbooks. It can also charge tablets, smartphones, game consoles, and other mobile devices - up to 3 devices at once with 65W distributed across the 3 USB ports.

Product Specifications

Model	(US) FC83U (EU) FC83E
Dimension	(US) 39 x 34 x 76mm (1.54 x 1.34 x 3in) (EU) 39 x 34 x 106mm (1.54 x 1.34 x 4.17 in)
Weight	145g
Material	PC
Input	100 - 240V -50/60Hz 1.5A Max
Output	USB-C1 : 5V-3A 9V-3A 12V-3A 15V-3A 20V-3.25A Max 65W USB-C2 : 3.3-16V-3A max 5V-3A 9V-3A 12V-2.5A 15V-2A 20V-1.5A Max 30W USB-A : 4.5V-5A 5V-4.5A 9V-2A 12V-2A Max 24W USB-C1+USB-C2 : 45W+18W Max 63W USB-C1+USB-A : 45W+18W Max 63W USB-C2+USB-A : 5V-5A [Shared 25W] USB-C1+USB-C2+USB-A : [45W+ Shared 15W] Max 60W
Storage temperature	-40°C to +70°C
Operating temperature	0°C to +25°C
Supported Charging Standards	Power Delivery (PD3.0) PPS, Qualcomm® Quick Charge™ (QC3.0 / 2.0), Apple 2.4A, Huawei SCP / FCP, Samsung AFC & MediaTek® Pump Express™

03 Declaration of RoHS 2.0 Compliance

We're determined to reduce the impact we have on the environment and take responsibility for the earth we live on. So this document allows us to formally declare that the FC83, manufactured by Charby Sdn. Bhd., fully complies with the European Parliament's RoHS (Restriction of Hazardous Substances) 2.0 Directive 2011/65/EU, with respect to all the following substances:

01. Lead (Pb)
02. Mercury (Hg)
03. Cadmium (Cd)
04. Hexavalent Chromium (Cr (VI))
05. Polybrominated biphenyl (PBB)
06. Polybrominated diphenyl ether (PBDE)
07. Di(2-ethylhexyl) phthalate (DEHP)
08. Dibutyl phthalate (DBP)
09. Benzyl butyl phthalate (BBP)
10. Diisobutyl phthalate (DIBP)

Our compliance is witnessed by written declaration from our suppliers. This confirms that any potential trace contamination levels of the substances listed above are below the maximum level set by EU 2011/65/EU, or are exempt due to their application. The FC83 manufactured by Charby Sdn. Bhd. meets all the requirements of EU 2011/65/EU.

05

SAFETY GUIDELINES

01. **Do not** expose your charger to direct sunlight, leave it inside your car under the hot sun, or place it near heat sources or flammable materials.
02. **Do not** disassemble or attempt to repair your charger unless you're a qualified professional.
03. **Do not** throw, hit, drop, or allow any substantial impact to your charger.
04. **Do not** store your charger in a damp place or immerse it in water. If water gets into your charger, allow it to dry naturally before use.
05. **Keep** your charger out of reach of children to avoid improper use.
06. **Avoid** touching your charger while it is charging. Your charger might get hot during charging because this charger uses GaN and is more compact than other chargers, the heat output can reach a temperature of 70°C at full power.

Note:

Improper use may cause injury, property damage, and may damage your device. Charby is not responsible or liable for any damage or harm incurred because of the user's failure to follow the instruction in this manual.

We welcome any questions or suggestions for improvement.

You can contact us in the following ways:

Email: support@charbycharge.com

Facebook: facebook.com/charbycharge



06

LIMITED HARDWARE WARRANTY

Charby warrants that this Product will be free from defects in material and workmanship under normal use for a period of one (1) year starting from the date of delivery. In the event Charby determines, in its sole discretion, that the Product suffers from material defects in manufacture and does not substantially conform to the published specifications under normal use within the Warranty Period, Charby will, at its option: (i) repair the Product at no charge with a new or refurbished components or (ii) replace the Product with a new or refurbished Product upon return of the defective Product. Any replacement product will be warranted for the remainder of the returned unit's original warranty period or 30 calendar days, whichever is longer.

The warranty stated herein shall not apply if: (i) the Product was not used in accordance with any accompanying instructions; (ii) the Product was not used for its intended function and environment; (iii) the Product has been modified, repaired, or opened intentionally by any party other than Charby; (iv) any defects or damages caused by wear and tear, accident, misuse, abuse, abnormal conditions, improper storage, exposure to moisture, dampness or corrosive environments, improper installation, incorrect voltage application, food or liquid spillage, natural disaster or other external causes.

To the extent permitted by law, Charby does not assume any liability for the loss or damage resulting from the purchase, use or misuse of, or inability to use the Product or from the breach of the express warranty, including incidental, special, consequential or similar damages, or loss of anticipated profits or benefits. Charby's liability shall be limited to the purchase value of the product.



CHARBY PICO

POCKET-SIZED 65W GAN CHARGER